




UGY130TK

UNIVPOWER SILENT SERIES

POWER OUTPUT

Prime Rating — 96 kW (120 kVA)
 Standby Rating — 105 kW (131 kVA)
 3-Phase, 60 Hertz, 0.8 PF

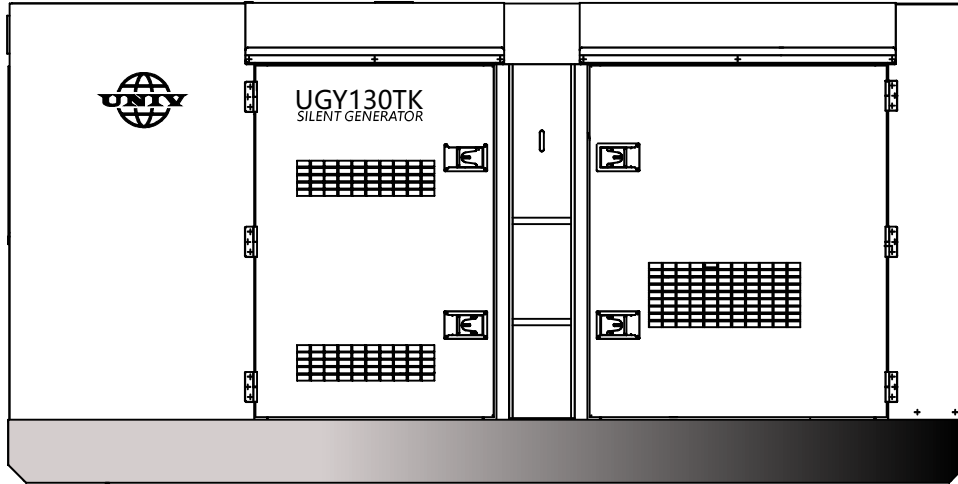

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 75dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaningcycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

UNIVPOWER SILENT SERIES


UNIV POWER DECIBELLEVELS

Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets are at home on construction sites, in residential neighborhoods, and at hospitals just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- UNIVGenset at 7m
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

75.0
DECIBELS

GENERATOR OUTPUT PANEL

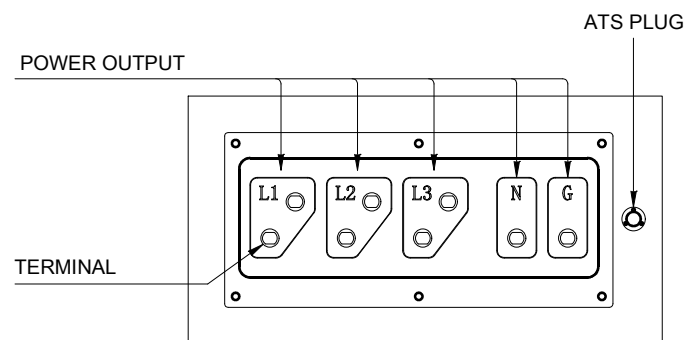



UGY130TK

UNIVPOWER SILENT SERIES

SPECIFICATIONS

| Generator Specifications | |
|--|--|
| Model | Revolving field, self-ventilated weatherproof |
| Armature Connection | Star with Neutral |
| Phase | 3 |
| Standby Output | 110KW (137.5KVA) |
| Prime Output | 96KW (120 KVA) |
| Power Factor | 0.8 |
| Voltage Regulation (No load to full load) | ±0.5% |
| Generator RPM | 1800 |
| Frequency | 60 Hz |
| No. of Poles | 4 |
| Excitation | Brushless with AVR |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | ±0.25% of mean value for constant loads from no load to full load. |
| Insulation | Class H |
| Sound Level dB(A) Full load at 7M | 75 |

| Amperage | |
|--|--------------|
| Rated Voltage | Maximum Amps |
| 3Ø Volt 254/440 | 180.4 Amps |
| 3Ø Volt 127/220 | 360.9 Amps |
| Main Line Circuit Breaker Rating | 400 Amps |
| Over Current Relay Trip Set Point 400V Mode Only | 450 Amps |

| Fuel System | |
|--------------------|---------------------------|
| Fuel Tank Capacity | 44.9 gallons (170 liters) |
| Fuel Consumption | L / h |
| At full load | 25.4 |
| At 3/4 load | 20.3 |
| At 1/2 load | 14 |
| At 1/4 load | 7.6 |

| Control system | |
|--------------------|-------------------------------|
| Controller Brand | SmartGen |
| Model | HGM420 |
| Module | Manual/Auto start/stop module |
| Standard function | Engine control |
| | Generator monitoring |
| | Generator protection |
| | Specification |
| Display | Frequency |
| | Battery voltage |
| | Running hour |
| Warning/shutdown | under/over voltage |
| | under/over speed |
| | under/over frequency |
| | Low oil pressure |
| | High water temperature |
| Communication port | USB |

| Engine Specifications | |
|---------------------------|--|
| Make / Model | LR4N5LP-D60EF-U2 |
| Emissions | / |
| Starting System | Electric |
| Design | 4-cycle, water cooled, direct injection, natural intake air cooled |
| Displacement | 5.32 liters |
| No. cylinders | 6 |
| Bore x Stroke | 112 x 135 mm |
| Gross Engine Power Output | 145 hp (108 kW) |
| Compression Ratio | 17 : 1 |
| Engine Speed | 1800 rpm |
| Overspeed Limit | 2050 rpm |
| Oil Capacity | 3.7 gallons (14 liters) |
| Coolant Capacity | 1.59 gallons (6 liters) |
| Battery | 24V 80Ah x 2 |

| Alternator | |
|---------------------------------|--------------------------------|
| Alternator Brand | KWISE |
| Alternator Model | S274G80B1 |
| Excitation | Brushless, Self-Excited system |
| Capacity(KVA) | 120kva |
| Power(KW) | 96kw |
| Efficiency(%) | 88.9% |
| Insulation class | Class H |
| Protection class | Ip23 |
| Steady state voltage regulation | ±1% |
| Voltage control | AVR |

WARRANTY*

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




UGY130TK

UNIVPOWER SILENT SERIES

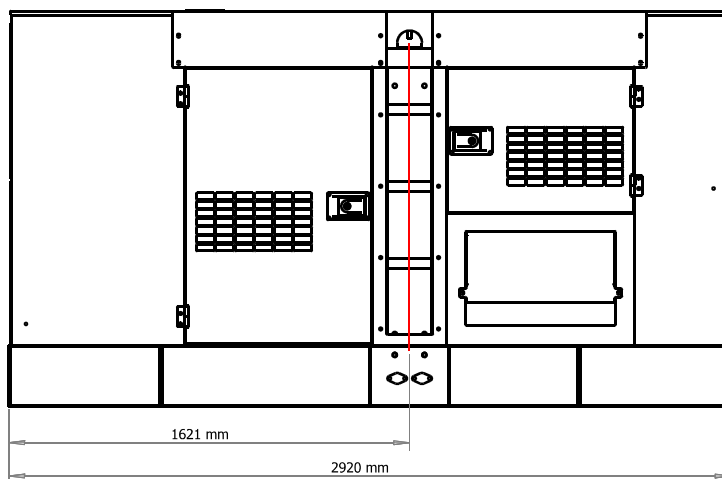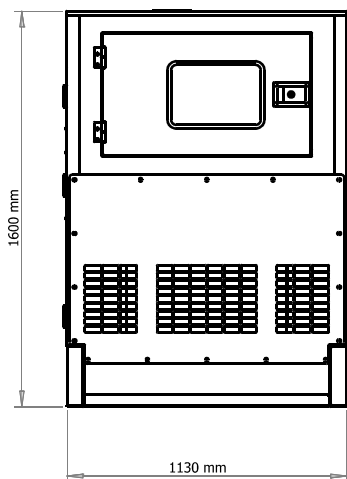

| Weight | |
|-----------------------------|----------|
| Dry Weight | 1,900 kg |
| Wet Weight | 2,120 kg |
| Max. Lifting Point Capacity | 4,300 kg |

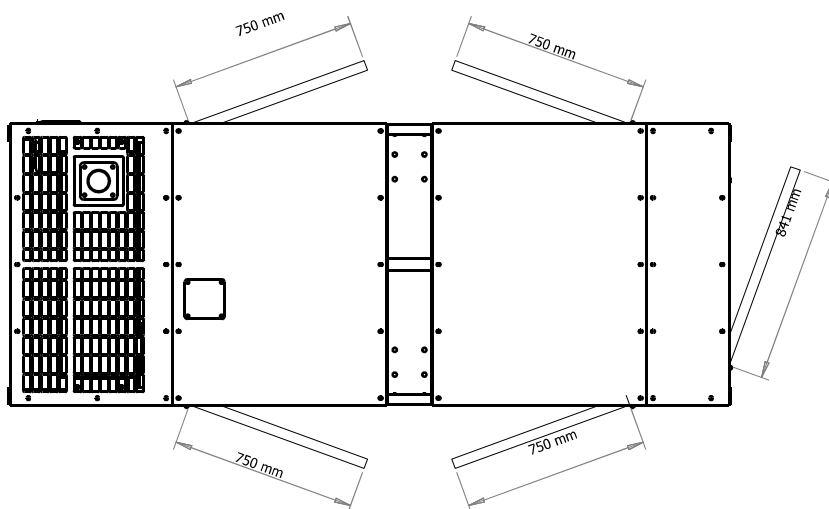

Manufactured by
Zhejiang Universal Machinery Co., Ltd
Add: No 18-9 Nanshan Road, Qujiang Zone,
Quzhou city, Zhejiang Province, CN
Tel: 0086-570-3377022
Fax: 0086-570-3377023
Website: www.univpower.com